
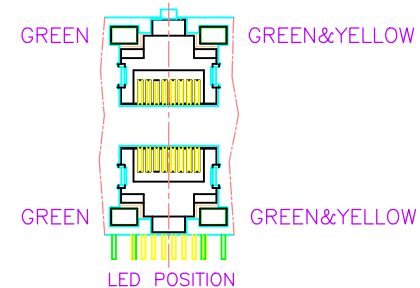
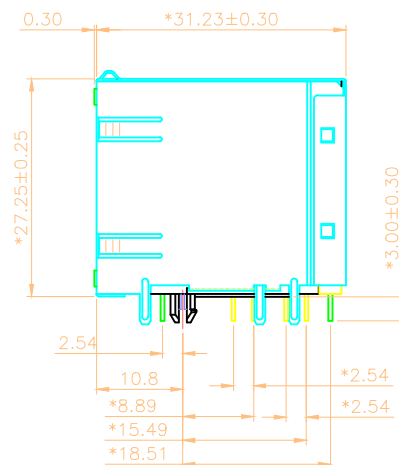



RoHS Compliant

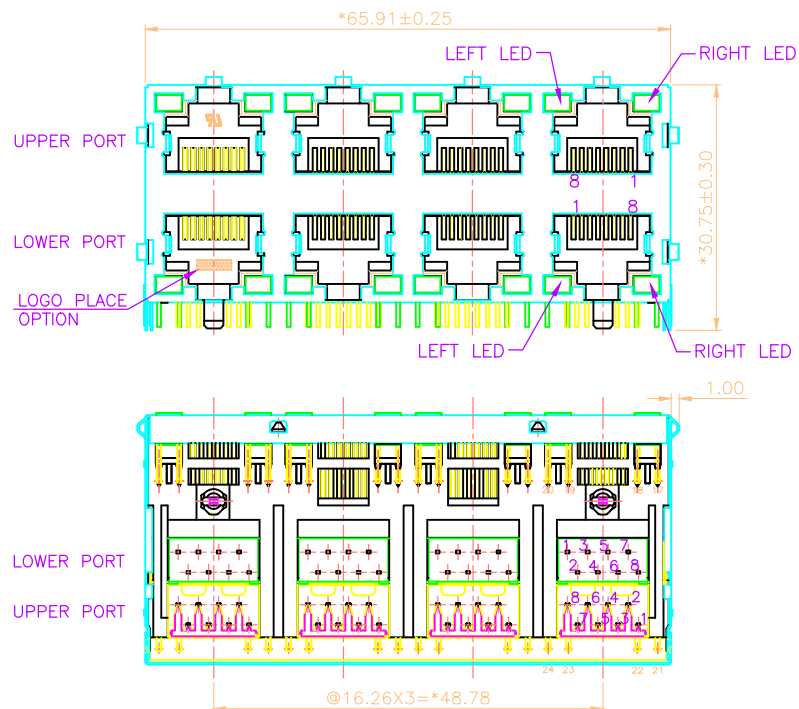

**NOTES:**

**ELECTRICAL:**

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 60 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

**MECHANICAL:**

- HOUSING MATERIAL : PBT+30%GF UL94V-0./COLOR:BLACK.
- SHIELD MATERIAL : BRASS THICKNESS 0.25mm.
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER : 10 LBS MIN.
- LED COLOR : OPITON

**ENVIRONMENTAL:**

- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- WAVE SOLDERING TEMPERATURE: 230~240°C(3~5 SECONDS).
- RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.  
CUL FILE NO. E345295


TOP-LEVEL-ASSEMBLY APPEARANCE QUALITY AND OTHERS ACCORDING TO QAIP-008 IF NOTHING ELSE IS SPECIFIED.

DIMENSIONS WITH "QC" MARK HAVE TO BE MEASURED IN IPQC INSPECTION

PART NUMBER: ZW2J8M-XY4C2BX

0-W/O LOGO  
1-W/ ZSNOW LOGO  
2-W/ "F" LOGO

Gold Thickness:  
1-3u" 2-6u" 3-15u"  
4-30u" 5-50u"

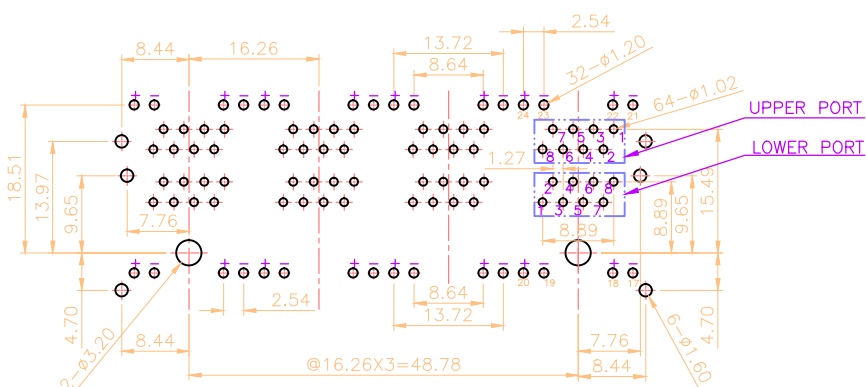

PC Board Layout Component Side Shown  
PC Board Thickness=1.6mm PCB TOLERANCE:±0.05

Inspection Item	DIMENSION IN mm [Inch]		<b>ZSNOW</b>		ZSNOW ELECTRONIC CO., LTD	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NUMBER		DRAWING NUMBER	
	.X±0.30 X.*± 2.0'		SEE NOTE		ZW2J8M-XY4C2BX	
	.XX±0.20 .X.*± 1.0'		TITLE			
.XXX±0.10		RJ45(LED) STACKED GANGED JACK, 2X4				
APPROVE	CHECK	DRAW	PROJ.	SHEET 1 OF 1		
TIMLEE	SKYCHEN	YANGLAN	SCALE 2 : 1	SIZE A3	REV P2	
08/17/12'	08/17/12'	12/16/10'				

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN ZSNOW ELECTRONICS PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM ZSNOW ELECTRONICS CO.,LTD.