

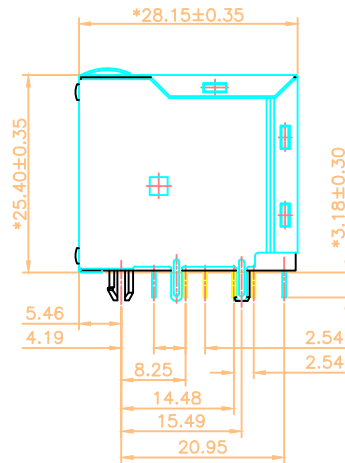


# 网站图纸

RoHS Compliant

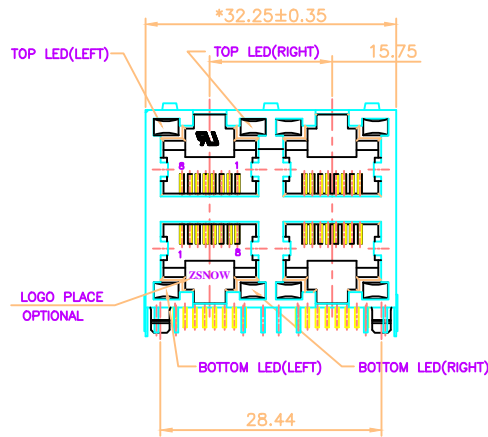

PART NUMBER: ZW2J88-XX2MYFX

**NOTES:**

**ELECTRICAL:**

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

**MECHANICAL:**

- HOUSING MATERIAL : PBT UL94V-0./COLOR:BLACK.
- CONTACT MATERIAL : PHOSPHOR BRONZE  $\phi$ 0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

**ENVIRONMENTAL:**

- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.


MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

RoHS PART NUMBER: ZW2J88-XX2MYFX

0-W/O LOGO  
1-W/ ZSNOW LOGO  
2-W/ "F" LOGO

Gold Thickness:  
1-3u" 2-6u"  
3-15u" 4-30u"  
5-50u" F-GOLD FLASH

A-RIGHT:GREEN LEFT:GREEN  
B-RIGHT:ORANGE LEFT:GREEN  
C-RIGHT:YELLOW LEFT:GREEN  
L-RIGHT:GREEN LEFT:YELLOW  
V-RIGHT:GREEN+YELLOW LEFT:GREEN+YELLOW

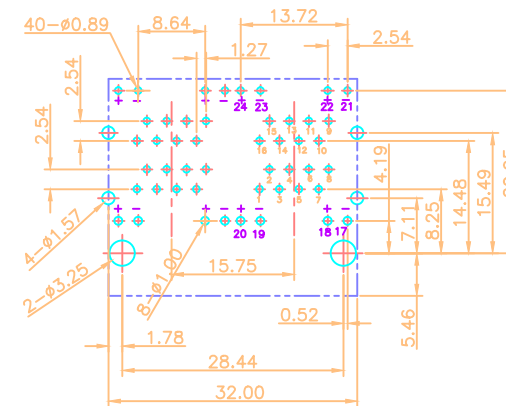

PCB LAYOUT(t=1.60mm)

QC : Inspection Item	Cp/Cpk and SPC Control Item	DIMENSION IN mm [Inch]		ZSNOW ELECTRONIC CO., LTD	
		TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NUMBER	DRAWING NUMBER
		.X± 0.30	X.*± 2.0°	SEE NOTE	ZW2J88-XX2MYFX
		.XX± 0.20	.X*± 1.0°	TITLE	
.XXX± 0.10		MINI 2X2 LED JACK			
APPROVE	CHECK	DRAW	PROJ.	SHEET 1 OF 1	
TIM 11/25/16'	HAPPY 11/25/16'	ZERO 11/25/16'	SCALE 3 : 1	SIZE A4	REV P1

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON THE CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN ZSNOW ELECTRONICS PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM ZSNOW ELECTRONICS CO., LTD.