
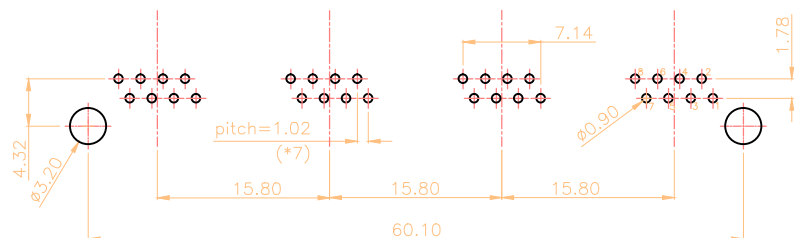
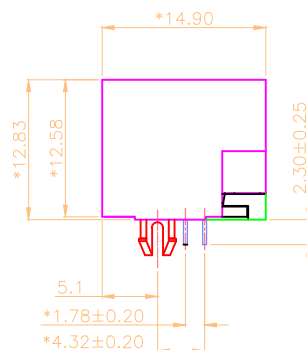


RoHS Compliant

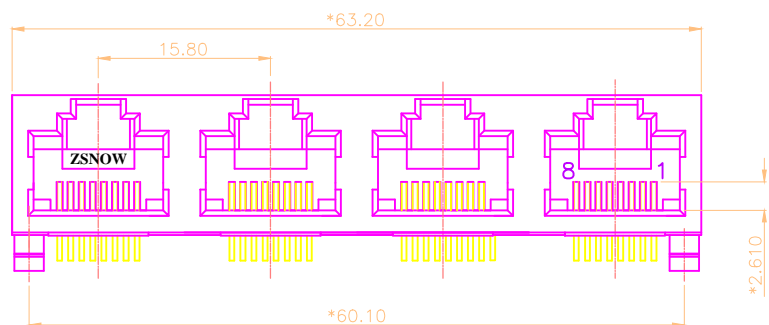

PC Board Layout Component Side Shown
PC Board Thickness=1.6mm
Tolerance±0.05

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.
- OPERATING: 750 CYCLES MIN.

MECHANICAL:

- HOUSING MATERIAL : PBT UL94V-0./COLOR:YELLOW 114C.
- INSERT MATERIAL : PBT UL94V-0./COLOR:BLACK.
- BACK PLATE MATERIAL : PBT UL94V-0./COLOR:BLACK.
- LED SIZE : 3.1*1.9*4.1*P=2.54mm.
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
 - OPERATION: -40°C TO +85°C.
 - WAVE SOLDERING TEMPERATURE: 230°C~240°C (3~5 SECONDS).
 - RoHS COMPLIANT.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E345295

PART NUMBER: ZW2J88-J1XXS4X

1-3u" 2-6u" 3-15u"
4-30u" 5-50u" F-GOLD FLASH

28-W/ ZSNOW LOGO,HOUSING:YELLOW 114C, INSERT&PLATE:BLACK

Inspection Item	DIMENSION IN mm [Inch]		ZSNOW		ZSNOW ELECTRONIC CO., LTD	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NUMBER		DRAWING NUMBER	
	.X± 0.30 X.*± 2.0°		SEE NOTE		ZW2J8X-J1XXS4X-16	
	.XX± 0.20 .X.*± 1.0°		TITLE			
	.XXX± 0.10		W/O SHIELD,SIDE ENTRY LED JACK 1*4			
APPROVE	CHECK	DRAW	PROJ.	SHEET	1 OF 1	
TIM	ZERO	HAPPY				
01/11/19'	01/11/19'	01/11/19'		SCALE	SIZE	REV
				2 : 1	A3	P1