

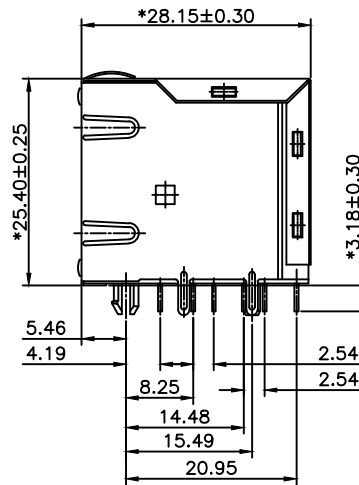


网站图纸

RoHS Compliant

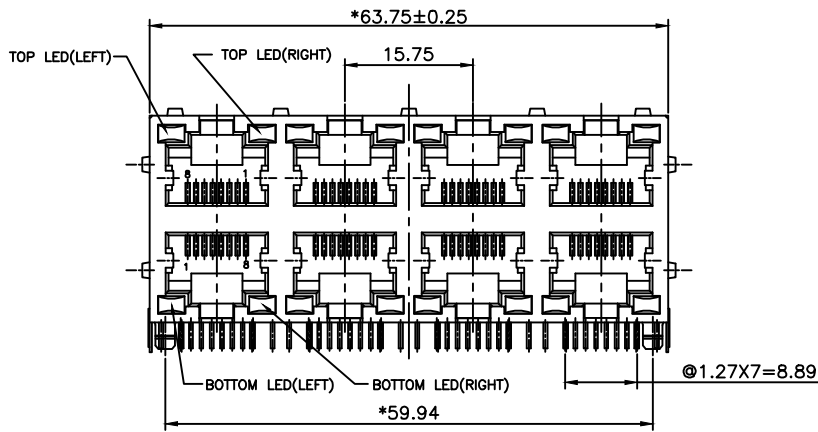

PART NUMBER: ZW2J88-JU18SDX

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : PBT UL94V-0./COLOR:BLACK.
- CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


- STORAGE : -40°C TO $+85^{\circ}\text{C}$.
- OPERATION: -40°C TO $+85^{\circ}\text{C}$.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

RoHS PART NUMBER: ZW2J88-JUXXSDX

Gold Thickness:
 1-3u" 2-6u"
 3-15u" 4-30u"
 5-50u" F-GOLD FLASH

18-W/O LOGO, LEFT LED: GREEN, RIGHT LED: GREEN & ORANGE

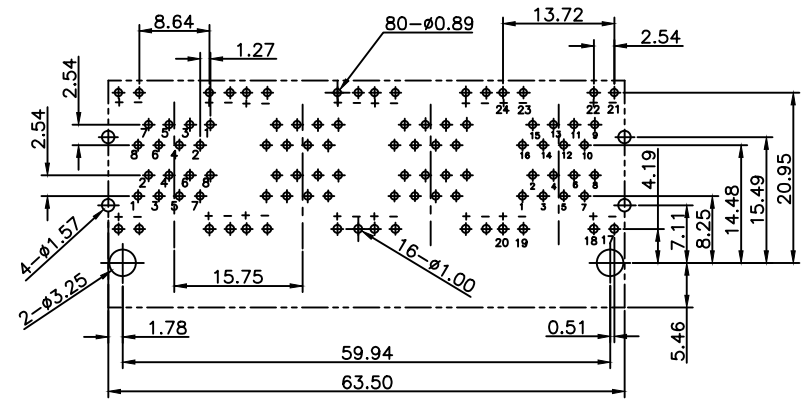

PCB LAYOUT(t=1.60mm)

| | | | | |
|--------------------|--------------------------------------|---------------------|---------------------------|-------------------|
| QC Inspection Item | DIMENSION IN mm [Inch] | | ZSNOW ELECTRONIC CO., LTD | |
| | TOLERANCE UNLESS OTHERWISE SPECIFIED | | | |
| | .X± 0.30 | X."± 2.0" | SEE NOTE | ZW2J8X-JUXXSDX-13 |
| | .XX± 0.20 | .X"± 1.0" | TITLE | |
| | .XXX± 0.10 | | MINI 2X4 LED JACK | |
| APPROVE | CHECK | DRAW | PROJ. | SHEET 1 OF 1 |
| Tim 2018,01,24 | Zero 2018,01,24 | Happy 2018,01,24 | | REV P1 |
| | | SCALE 5:2 | SIZE A3 | |

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN ZSNOW ELECTRONICS PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM INM80 ZSNOW ELECTRONICS CO.,LTD.