

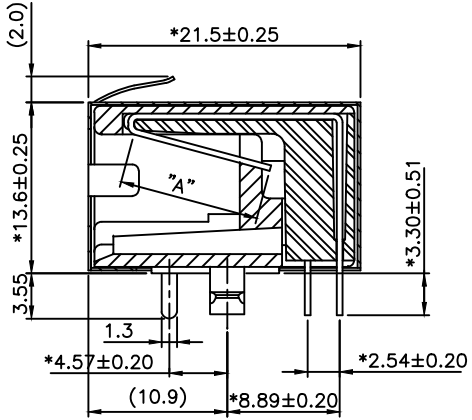
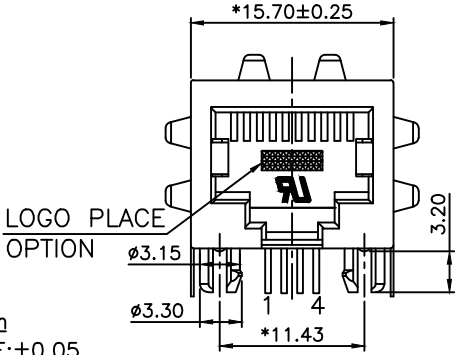


RoHS Compliant

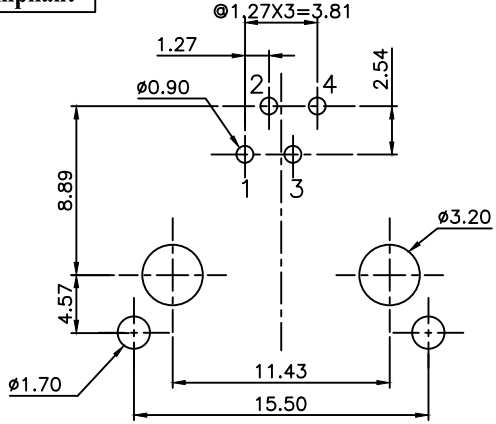

- NOTES:**
- ELECTRICAL:**
- 1. VOLTAGE RATING : 125 VAC RMS MIN.
 - 2. CURRENT RATING : 1.5 AMP MIN.
 - 3. CONTACT RESISTANCE : 45 MILLIOHMS MAX.
 - 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
 - 5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.
 - 6. NETWORK CONNECTION SPEED : 1G.
- MECHANICAL:**
- 1. HOUSING MATERIAL : PA6T UL94V-0./COLOR:BLACK.
 - 2. INSERT MATERIAL : PBT UL94V-0./COLOR:BLACK.
 - 3. SHIELD MATERIAL : BRASS THICKNESS 0.20mm.
 - 4. SHIELD PLATING : PLATING NICKEL 30~50U"
 - 5. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46$ mm
 - 6. PLATING : GOLD PLATING OVER NICKEL.
 - 7. OPERATING LIFE : 750 CYCLES MIN.
 - 8. PCB RETENTION PRE-SOLDER : 1 LB MIN.
 - 9. PCB RETENTION POST-SOLDER : 10 LBS MIN.

- ENVIRONMENTAL:**
- 1. STORAGE : -40°C TO +85°C.
 - 2. OPERATION: -40°C TO +85°C.
 - 3. WAVE SOLDERING TEMPERATURE: 250~260°C(5~10 SECONDS).
 - 4. RoHS COMPLIANT.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
CUL FILE NO. E345295
PART NUMBER: ZW2904-XL5013X

0-W/O LOGO
1-W/ ZSNOW LOGO
2-W/ "F" LOGO

1-3u" 2-6u"
3-15u" 4-30u"
5-50u"

inspection item	DIMENSION IN mm [Inch]		ZSNOW ELECTRONIC CO., LTD	
	TOLERANCE UNLESS OTHERWISE SPECIFIED			
	.X ± 0.30	X." ± 2.0"	SEE NOTE	ZW2904-XL5013X
	.XX ± 0.20	.X" ± 1.0"	TITLE	
.XXX ± 0.10		20.57 PCB JACK 10P		
APPROVE	CHECK	DRAW	PROJ.	SHEET 1 OF 1
Tim, Lee 2016,03,19	Happy, Huang 2016,03,19	Zero, Jin 2016,03,19	3:2	REV 01
			SCALE	SIZE A3

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN ZSNOW ELECTRONICS PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM INHBO ZSNOW ELECTRONICS CO.,LTD.