




网站图纸

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD



NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : PBT. /COLOR: YELLOW.
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO


FCC PART 68, SUBPART F.

PART NUMBER: ZW260X-X00AW7X


NO. OF CONTACT
4-4 CONTACTS
8-8 CONTACTS
1-10 CONTACTS

1-3u" 2-6u" 3-15u"
4-30u" 5-50u" F-GOLD FLASH

0-W/O LOGO
1-W/ ZSNOW LOGO
2-W/ "F" LOGO

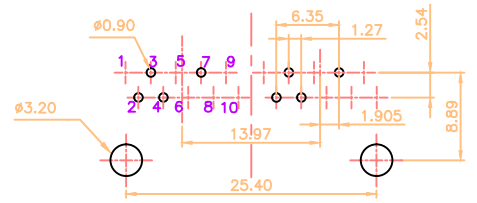

FOR : 4C

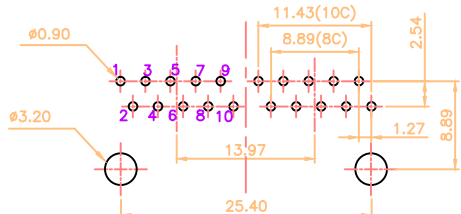

PC Board Layout t = 1.60mm
Component Side Shown

<p>MM (INCH)</p> <p>TOLERANCES EXCEPT AS NOTED</p>		<p>DFTO ASHELLY DATE 11/12/09</p> <p>CHKD OSCAR DATE 11/13/09</p> <p>MFO DATE</p> <p>APPLV SKRYCHEN DATE 11/13/09</p>	<p>ZSNOW ELECTRONIC CO., LTD</p>	
<p>DETACHED LIST</p> <p>MM ±</p> <p>.0 ±0.30 ±</p> <p>.00 ±0.10 ±</p> <p>.000 ±0.10 ±</p> <p>ANGLES ±</p> <p>THIRD ANGLE PROJECTION</p>		<p>MATERIAL :</p> <p>QT'Y :</p> <p>FINISH :</p> <p>SCALE : 5:1</p>	<p>TITLE</p> <p>11.5 SIDE ENTRY PCB GANG JACK 10P</p> <p>DRAWING NO. ZW260X-X00AW7X SIZE REV</p> <p>/PART NO. SEE NOTE A3 P1</p> <p>DO NOT SCALE DRAWING SHEET 1 OF 1</p>	

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1