

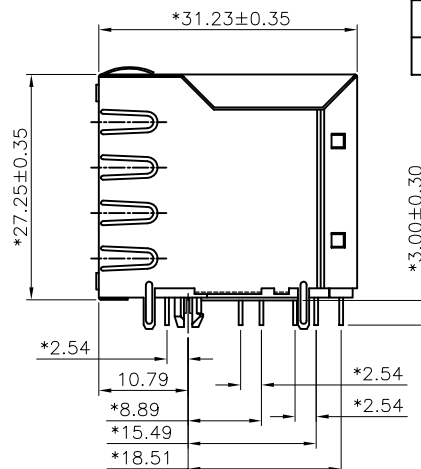


网站图纸

RoHS Compliant

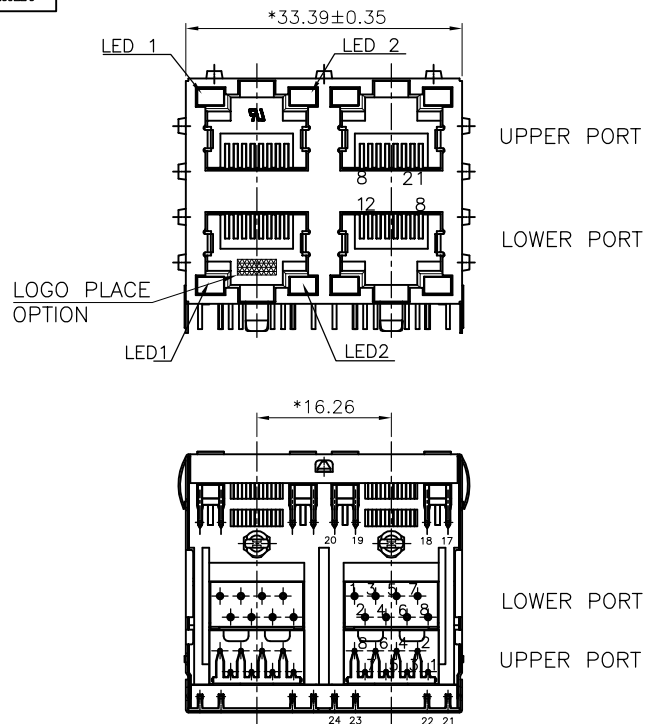

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 60 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : PBT+30%GF UL94V-0./COLOR:BLACK.
- INSERT MATERIAL : PBT+30%GF UL94V-0./COLOR:BLACK.
- CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:



- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- WAVE SOLDERING TEMPERATURE: 230~240°C(3~5 SECONDS).

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. E345295

PART NUMBER: ZW2J88-XXMA2FX

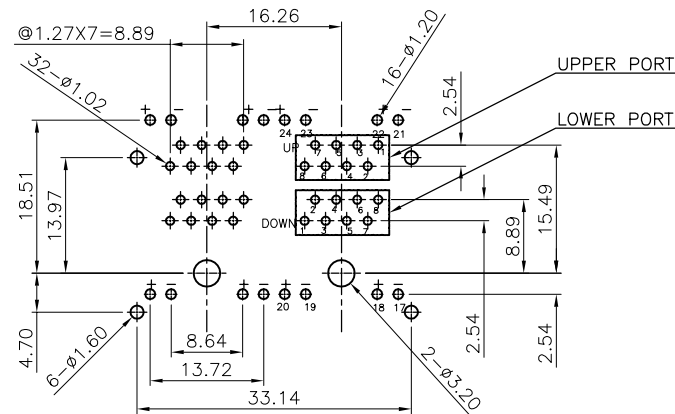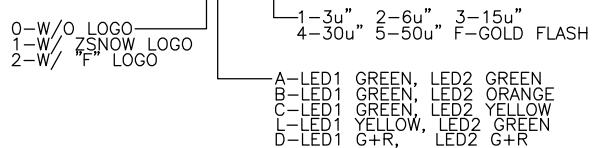

PC Board Layout Component Side Shown

PC Board Thickness=1.6mm

Tolerance±0.05

Inspection Item @	DIMENSION IN mm [Inch]				ZSNOW ELECTRONIC CO., LTD	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NUMBER		DRAWING NUMBER	
	.X±0.30 X.*±2.0°		ZW2J88-XXMA2FX		ZW2J88-XXMA2FX	
	.XX±0.20 .X*±1.0°		TITLE			
.XXX±0.10		RJ45(LED) STACKED GANGED JACK, 2X2				
APPROVE	CHECK	DRAW	PROJ.	SHEET	OF	
TIMLEE 10/19/12'	YAMEI 10/19/12'	SKYCHEN 10/19/12'	2:1	1	1	
			SCALE	SIZE	REV	
			2:1	A3	P2	

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN ZSNOW ELECTRONICS PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM MEMBER ZSNOW ELECTRONICS CO.,LTD.