
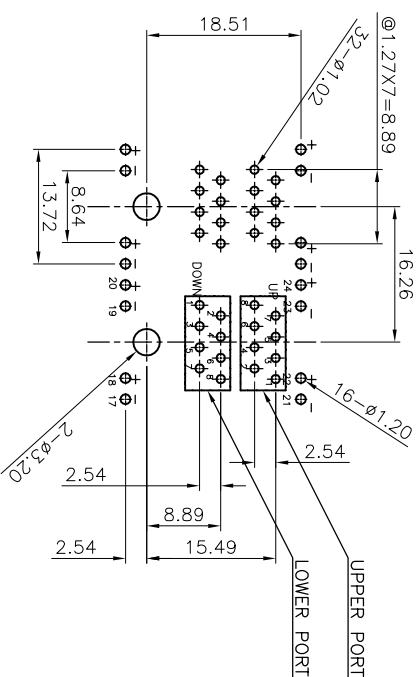
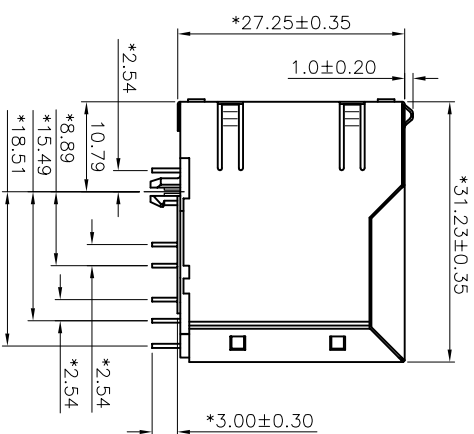



RoHS Compliant

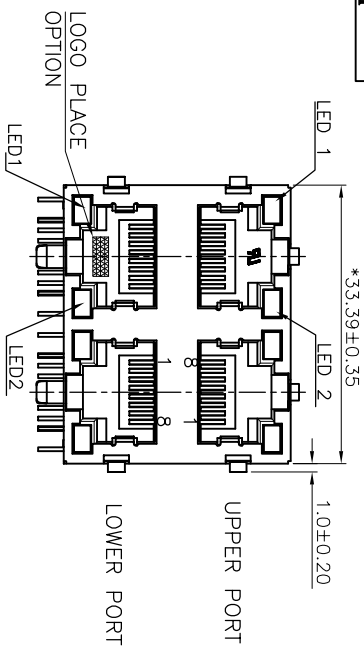

PC Board Layout Component Side Shown

PC Board Thickness=1.6mm

Tolerance±0.05

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 60 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60HZ, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT U194V-0/COLOR:YELLOW 114C.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.
3. WAVE SOLDERING TEMPERATURE: 230~240°C(3~5 SECONDS).
4. ROHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO

FCG PART NO. E343295

CUL FILE NO. E343295

PART NUMBER: ZW2J88-J4XXSBX

- 1-3u" 2-6u" 3-15u" 4-30u" 5-50u" F-GOLD FLASH
- 03-W/ ZSNOW LOGO,LED1 YELLOW(+,-), LED2 GREEN(+,-)

: Inspection Item		DRAWING NUMBER		ZSNOW ELECTRONIC CO., LTD	
DIMENSION IN mm [Inch]		PART NUMBER		DRAWING NUMBER	
TOLERANCE UNLESS OTHERWISE SPECIFIED		SEE NOTE		ZW2J8X-J4XXSBX-2	
X ± 0.30	X ± 2.0°	R3J45(LED) STACKED GANGED JACK, 2X2			
.XX ± 0.20	.X ± 1.0°	TITLE			
.XXX ± 0.10		PROL			
APPROVE	CHECK	SCALE 5 : 4			
TIME/EE	ZERO	SIZE A3			
07/06/17'	07/06/17'	REV P2			
DRAW		SHEET 1 OF 1			
HAPPY		REV P2			
07/06/17'					