


网站图纸

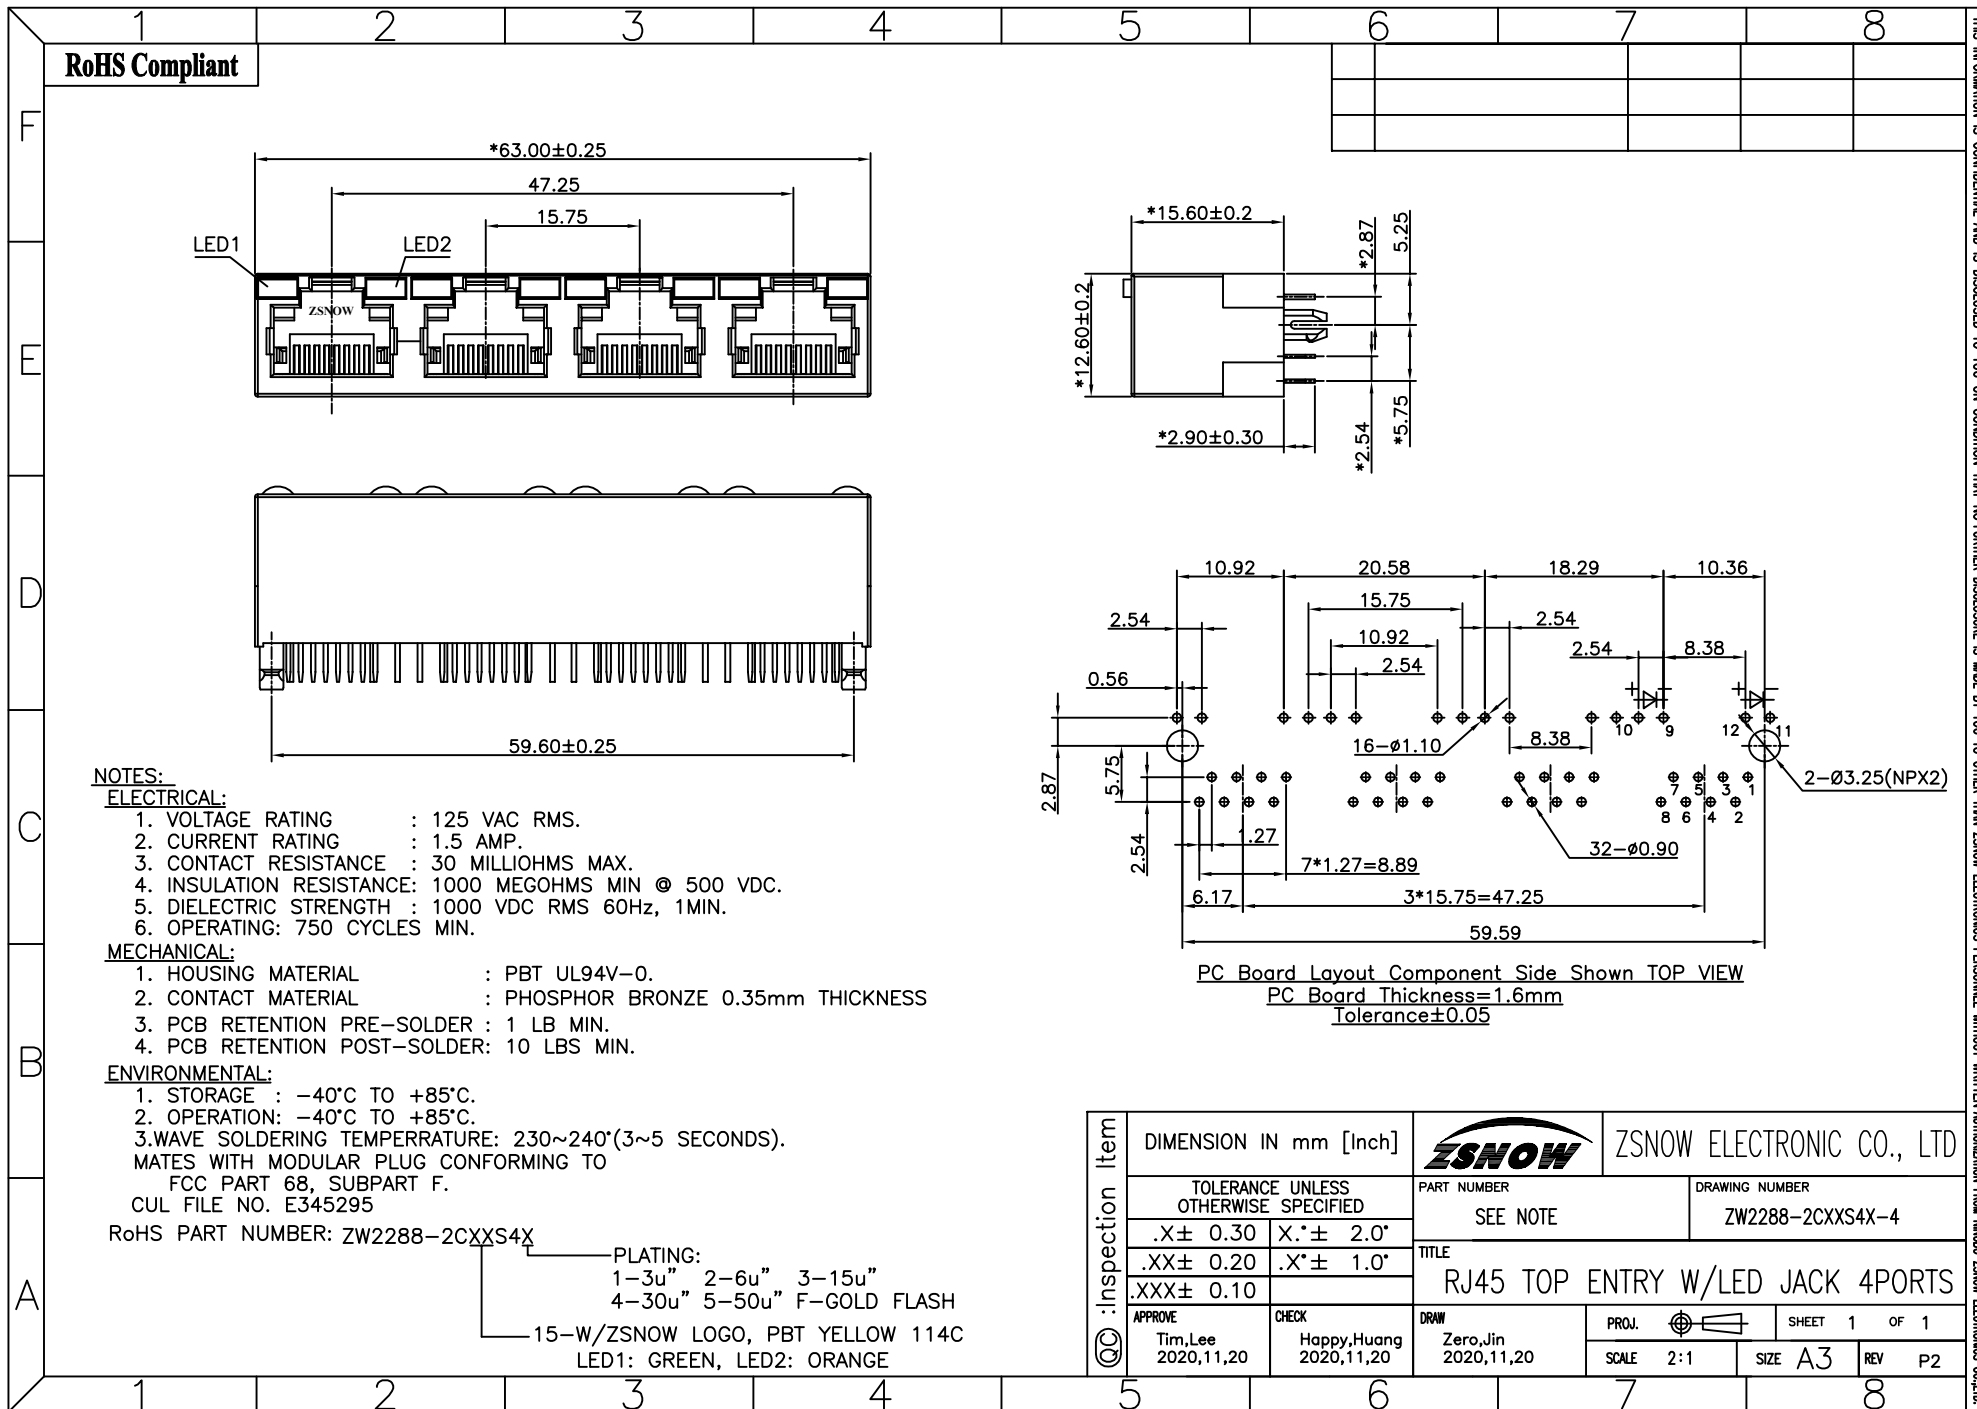

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN ZSNOW ELECTRONICS PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM NINGBO ZSNOW ELECTRONICS CO.,LTD.

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.
6. OPERATING: 750 CYCLES MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE 0.35mm THICKNESS
3. PCB RETENTION PRE-SOLDER : 1 LB MIN.
4. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
 2. OPERATION: -40°C TO +85°C.
 3. WAVE SOLDERING TEMPERATURE: 230~240°(3~5 SECONDS).
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E345295

RoHS PART NUMBER: ZW2288-2CXXS4X

PLATING:
1-3u" 2-6u" 3-15u"
4-30u" 5-50u" F-GOLD FLASH
15-W/ZSNOW LOGO, PBT YELLOW 114C
LED1: GREEN, LED2: ORANGE

QC Inspection Item	DIMENSION IN mm [Inch]		ZSNOW		ZSNOW ELECTRONIC CO., LTD	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NUMBER		DRAWING NUMBER	
	.X± 0.30 X.*± 2.0*		SEE NOTE		ZW2288-2CXXS4X-4	
	.XX± 0.20 .X*± 1.0*		TITLE			
	.XXX± 0.10		RJ45 TOP ENTRY W/LED JACK 4PORTS			
APPROVE	CHECK	DRAW	PROJ.	SHEET 1 OF 1		
Tim, Lee 2020,11,20	Happy, Huang 2020,11,20	Zero, Jin 2020,11,20		SCALE 2:1	SIZE A3	
			REV	P2		